

FlexNet® M400B Base Station


Compact Point-to-Multipoint Base Station

The Sensus FlexNet® M400B Base Station offers a strategic communications option for public service providers with endpoints deployed in remote or densely populated areas. The efficient transceiver can transmit and receive in a 200kHz band of spectrum. 200kHz enables more dedicated channels, resulting in higher network capacity, allowing more granular data and more channels of data. Sensus FlexNet communication network delivers double the transmit power of competitive systems over primary-use licensed spectrum – ensuring reliability for mission critical applications.

The tower-based architecture enables reliable communication of status and usage information with fewer access points than other network architectures. These compact, efficient base stations fit in space-constrained environments and require no air conditioning.

Benefits

- **Licensed radio spectrum** In North America, FCC/IC protected primary-use spectrum avoids competition with other wireless services, interference from other radio devices, and the risk of being taken over by emergency service providers
- **Fewer access points** Our point-to-multipoint architecture directly connects base stations to endpoints over large geographic areas – greatly reducing the number of network backhaul connections as well as O&M costs
- **Resilient network design** Sensus Base Stations continue to provide real time data during outages and emergencies because of eight hour plus battery backup – enabling better workforce management and faster service restoration
- **Small footprint** Flexible pole or wall-mounting options enable strategic deployment with a discreet appearance
- **Industry leading security** Sensus has achieved GE/Wurldtech™ Achilles® communications certification for critical infrastructure security against cyber threats

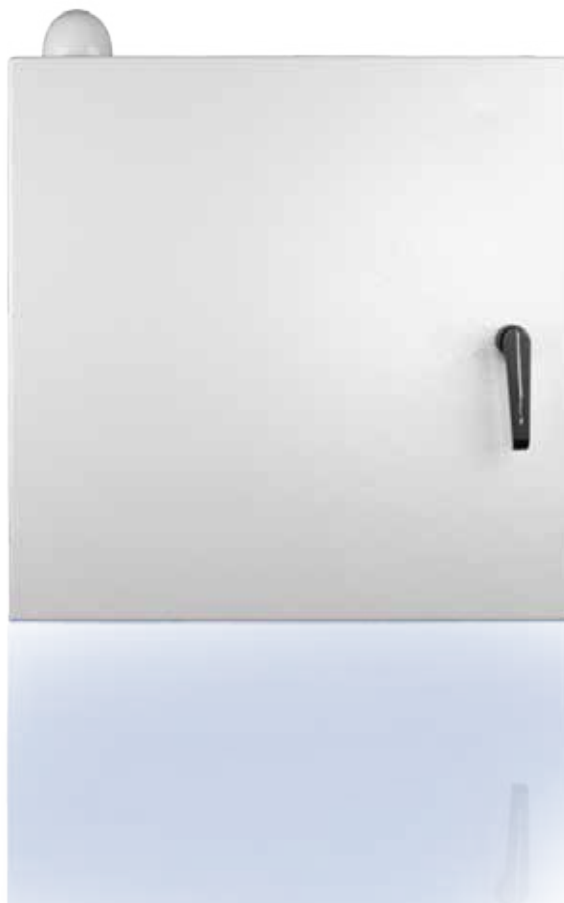

Features

- GPS receiver for time synchronization
- Duplexer for single antenna
- IP-addressable power supply with hot-swap capability
- 8-hour battery backup
- Alarms and reporting capability
- Backhaul via Ethernet/IP
- Heated battery for cold weather environments
- Modular construction for easy serviceability

Applications

- Two-way Advanced Meter Infrastructure (AMI)
- Distribution Automation (DA)
- Demand Response (DR)
- Home Area Networks (HAN)
- Sensus VantagePoint™ Lighting Control

Call your sales representative to see for yourself.

8601 Six Forks Road
Suite 700
Raleigh, NC 27615
1-800-638-3748
sensus.com



Properties

Receive Bandwidth	200 KHz
Transceivers	Single
Spectrum	Licensed 900 MHz PCS/MAS
Duplexing	Single transmit Eight receive channels - simultaneous/dedicated
Applications	Single
Expandability	No
Compatibility	SNMP
FlexNet	Requires RNI 3.x or newer

Enclosures - Outdoor - Pole/Wall Mount

Height	22" (55.9 cm)
Width x Depth	22" (55.9 cm) x 10.5" (26.7 cm)
Capacity	One transceiver
Temperature	-40° to +122° F (-40° to +50° C)
Voltage	120 VAC
Battery Backup	8 hours
NEMA Rating	4
Air Conditioned	No